

Hoods

HOODS PLAY AN IMPORTANT ROLE IN THE KITCHEN, BOTH AESTHETIC AND FUNCTIONAL. DESIGNED TO OFFER THE BEST COMBINATION OF STYLING AND FUNCTIONALITY, SMEG HOODS REFLECT THE ELEGANCE AND STYLE OF THE OTHER KITCHEN APPLIANCES WITH WHICH THEY ARE INSTALLED. THE USE OF THE BEST MATERIALS AND OUR ONGOING RESEARCH PROGRAMMES MAKE SMEG HOODS RELIABLE AND FUNCTIONAL PRODUCTS WHICH ENSURE HIGH PERFORMANCE THROUGHOUT THEIR LONG SERVICE LIFE.

Range Versatility

All hoods are available with modern styling, contemporary lines and a variety of finishes to offer an extraction solution to complement our other products. Sizes range from a modest 36cm up to an extra wide 150cm.

A variety of new models are featured in this brochure including three new 110cm "Symphony" hoods, 90cm & 100cm hoods in White, and the KSE912X hood which features display symbols to match Linea ovens.

Quality

Smeg always utilises the best materials, selecting the finest 18/10 stainless steel for brushed or polished finishes, tempered glass and coloured enamel. During production all hoods are subjected to rigorous testing of materials, operating noise, functions, and equipment both electrical and electronic. All models are given the Nemko quality mark, and the Smeg manufacturing plants are certified ISO 9001 and 14000.



Controls

Functional and ergonomic, Smeg hood controls are designed for quick and simple operation. Each hood is specified with either electronic or electromechanical controls, and some are fitted with our stylish Classic controls, to match the other Classic, Opera, Symphony and Concert products in the Smeg portfolio. Some models are fitted with distinctive illuminated touch controls, which include a warning light to indicate the charcoal filter requires replacement.



Filters

One of the most important parts of a hood is the filter. A good filter ensures excellent grease and fume absorption and must also be easy to dismantle for frequent cleaning. For best extraction and purification of the air, the filter must be clean. The period between active charcoal filter replacements and grease filter washes depends on the cooking style and how often the hood is used. The long life charcoal filter KITFC900 used on some models lasts up to 3 years, and can be washed in a mild detergent.




Perimeter Extraction

KI1207X, KDV907X and KDQ36X hoods all feature the innovative and extra efficient perimeter extraction method. The panels on the underside of the hood are solid stainless steel, with mesh grease filters fitted behind. A powerful motor extracts the steam and fumes through a channel round the perimeter of the hood base.

Lighting

There are a number of lighting options, dependent on the hood selected, and Smeg offers some hoods with special lighting units which combine energy saving with long service life. It is thus possible to select the most appropriate type of lighting while bearing in mind the energy cost. All Smeg hoods allow the light(s) to be illuminated independent of the extraction setting.

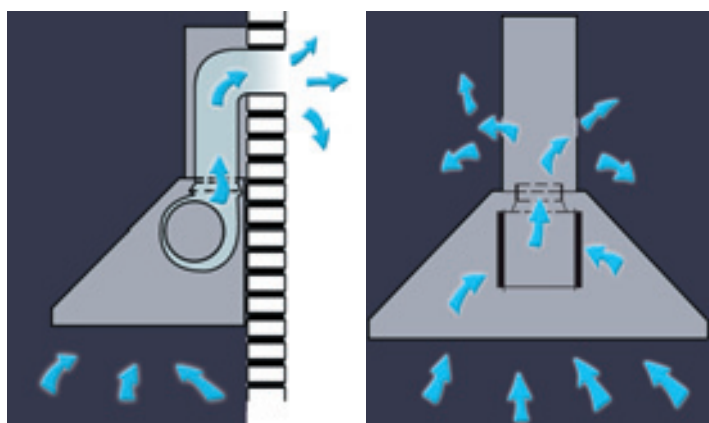

Extraction

Smeg hoods can operate in either a ducted or recirculation mode. A hood is an **'extractor'** when it sucks in air, extracts greasy particles and expels the air outdoors, using a vent kit. The minimum diameter of the hose in the kit should match the vent outlet of the hood.


It is a **'filter'** hood when it sucks in air, cleans it using active charcoal filters and recirculates it back into the kitchen completely purified.

The **'extraction rate'** is the amount of air which can be extracted in an hour. Smeg hoods use a variety of different powered motors which achieve extraction rates from 300 to 870 cubic metres per hour.


The full extraction rate will only be achieved in the ducted mode, the preferred choice wherever possible.

Vent kits available for all hoods


Simple vent kits include 1 metre of flexible hose, while comprehensive kits add a further 2 metres of ducting with two 1 metre flat channel sections

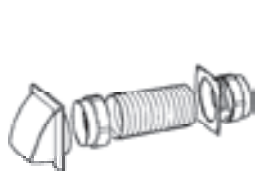


SP150



SP150FLAT



SP215



SP217

KSE912X

90CM CHIMNEY HOOD, ST/STEEL



1 high performance motor
Electronic soft touch controls
White digital display
4 speeds
3 x 20W halogen lights with dimmer switch
3 st/steel grease filters (dishwasher safe)
Intensive speed button (10 minute timer) for each speed
Automatic switch off (30 minute timer) for each speed
Filter cleaning/replacement indicator
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power: 390W

EXTRACTION RATES:

Ducted: 870 m³/h

Re-circulated: 730 m³/h

Noise Level : 46dB(A)

OPTIONAL EXTRAS:

Charcoal filter


Simple vent kit

Comprehensive vent kit

KITFC161

SP150

SP150FLAT

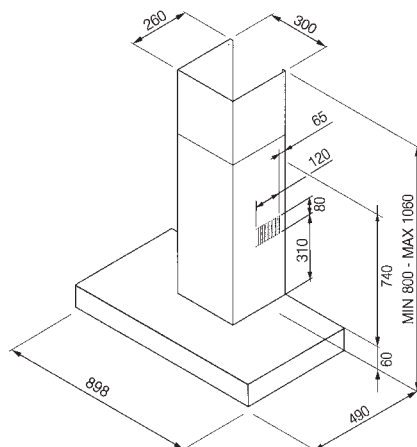



KSE912X

KCVR9NE

90CM ANGLED CHIMNEY HOOD, ST/STEEL AND BLACK GLASS




1 high performance motor
Electronic controls
Red digital display
Tilting glass panel
4 speeds
2 x 20W halogen lights with dimmer switch
1 St/steel grease filter (dishwasher safe)
Intensive speed button (10 minute timer) for each speed
Automatic switch off (30 minute timer) for each speed
Filter cleaning/replacement indicator
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power: 450W

EXTRACTION RATES:
Ducted: 870 m³/h
Re-circulated: 700 m³/h

Noise Level : 45dB(A)

OPTIONAL EXTRAS:
Charcoal filter kit **KITFTS**
Replacement charcoal filter **KITFC906**
Simple vent kit **SP150**
Comprehensive vent kit **SP150FLAT**

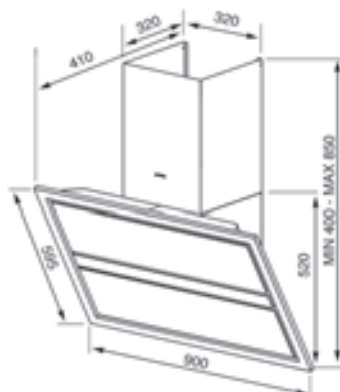



KCVR9NE

KTS75C

75CM ST/STEEL "LINEA SERIES" ANGLED CHIMNEY HOOD, ST/STEEL AND SILVER GLASS



- 1 high performance motor 240W
- 4 speeds
- 2 halogen lamps
- Tilting glass panel
- Electronic controls
- 1 st/steel anti grease filter (dishwasher safe)
- Automatic switch off (10 minute timer) for each speed
- Filter cleaning/replacement indicator
- Vent outlet Ø 150mm
- Nominal power 240W

EXTRACTION RATES:
Ducted: 800 m³/h
Recirculated: 720 m³/h

Noise level: 42dB(A)


OPTIONAL EXTRAS:
Charcoal filter kit
Replacement charcoal filter
Simple vent kit
Comprehensive vent kit

KITFTS
KITFC906
SP150
SP150FLAT

AVAILABLE IN THE FOLLOWING VERSIONS:

Silver glass
Black glass
Graphite glass

KTS75C
KTS75NC
KTS75AC

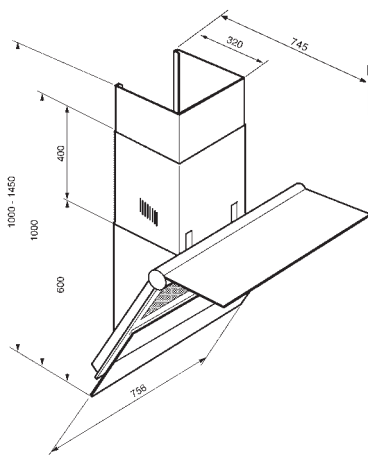

KTS75

75CM ST/STEEL "LINEA SERIES" ANGLED HOOD, ST/STEEL AND SILVER GLASS



- 1 high performance motor 240W
- 4 speeds
- 2 halogen lamps
- Tilting glass panel
- Electronic controls
- 1 st/steel anti grease filter (dishwasher safe)
- Automatic switch off (10 minute timer) for each speed
- Filter cleaning/replacement indicator
- Vent outlet Ø 150mm
- Nominal power 240W


EXTRACTION RATES:
Ducted: 800 m³/h

Noise level: 42dB(A)

OPTIONAL EXTRAS:
Simple vent kit
Comprehensive vent kit

SP150
SP150FLAT

NB: This model is not suitable for re-circulation

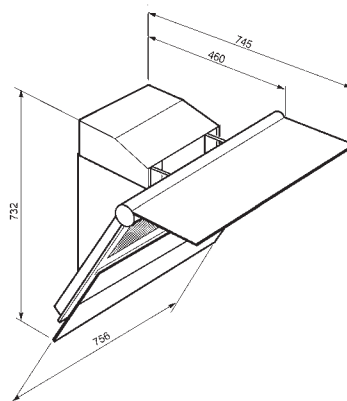



KTS75NC

KD150X-1

150CM ST/STEEL "OPERA" CHIMNEY HOOD



2 motors that can be selected to work together or independently
4 speeds for each motor
3 controls
5 st/steel grease filters (dishwasher safe)
4 halogen lamps
Internal recirculation possible
Vent outlet Ø 150mm
Nominal power: 500W

EXTRACTION RATES:


Ducted Motor x 2: 1250 m³/h
Ducted Motor x 1: 830 m³/h
Recirculated Motor x 2: 1080 m³/h
Recirculated x 1: 750 m³/h

Noise levels:

Motor x 2 41dB(A)
Motor x 1 38dB(A)

OPTIONAL EXTRAS:

Charcoal filters: **FLTK-1 x 2**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

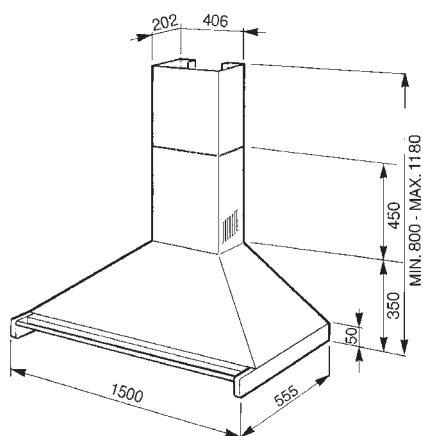

KD120X-1

120CM ST/STEEL "OPERA" CHIMNEY HOOD



1 motor, 165W, twin fan
4 speeds
4 st/steel grease filters (dishwasher safe)
2x20W Halogen lights
Internal recirculation possible
Vent outlet Ø 150mm
Nominal power 205W


EXTRACTION RATES:

Ducted 800 m³/h
Recirculated 720 m³/h

Noise level: 39dB(A)

OPTIONAL EXTRAS:

Charcoal filter **FLTK-1**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

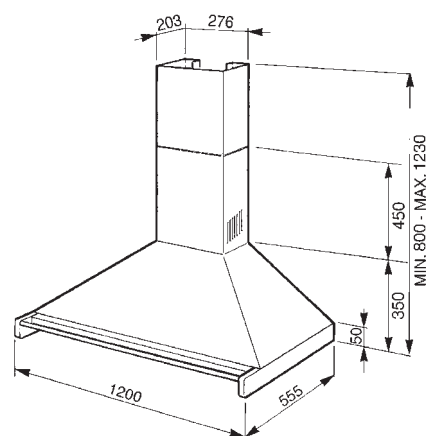

KD100X-1

100CM ST/STEEL "OPERA" CHIMNEY HOOD



1 motor, 165W, twin fan
4 speeds
3 st/steel grease filters (dishwasher safe)
2x20W Halogen lights
Internal recirculation possible
Vent outlet Ø 150mm
Nominal power 205W

EXTRACTION RATES:
Ducted 800 m³/h
Recirculated 720 m³/h

Noise level: 39dB(A)

OPTIONAL EXTRAS:

Charcoal filter **FLTK-1**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

AVAILABLE IN THE FOLLOWING VERSIONS:


St/Steel **KD100X-1**
Gloss Black **KD100N**
White **KD100B**

KD100N

100CM GLOSS BLACK "OPERA" CHIMNEY HOOD



KD100B White

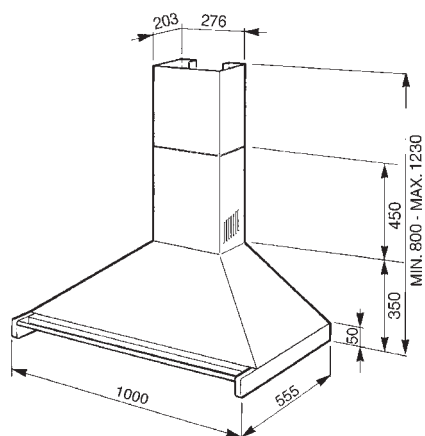

KD90X-1

90CM ST/STEEL "OPERA" CHIMNEY HOOD



1 motor, 165W, twin fan
4 speeds
3 st/steel grease filters (dishwasher safe)
2x20W Halogen lights
Internal recirculation possible
Vent outlet Ø 150mm
Nominal power 205W

EXTRACTION RATES:

Ducted 800 m³/h

Recirculated 720 m³/h

Noise level: 39dB(A)

OPTIONAL EXTRAS:

Charcoal filter

FLTK-1

Simple ducting kit

SP150

Comprehensive ducting kit

SP150FLAT

AVAILABLE IN THE FOLLOWING VERSIONS:

St/steel

KD90X-1

Gloss Black


KD90N

White

KD90B

KD90N

90CM GLOSS BLACK "OPERA" CHIMNEY HOOD

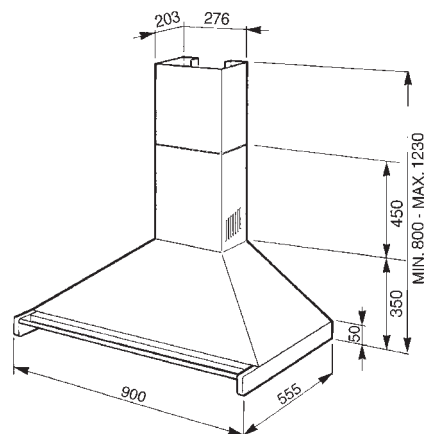

KD90B

90CM WHITE "OPERA" CHIMNEY HOOD



KD70X-1

70CM ST/STEEL "OPERA" CHIMNEY HOOD





1 motor, 165W, twin fan
4 speeds
2 st/steel grease filters (dishwasher safe)
2x20W Halogen lights
Internal recirculation possible
Vent outlet Ø 150mm
Nominal power 205W

EXTRACTION RATES:
Ducted 800 m³/h
Recirculated 720 m³/h

Noise level: 39dB(A)

OPTIONAL EXTRAS:
Charcoal filter **FLTK-1**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

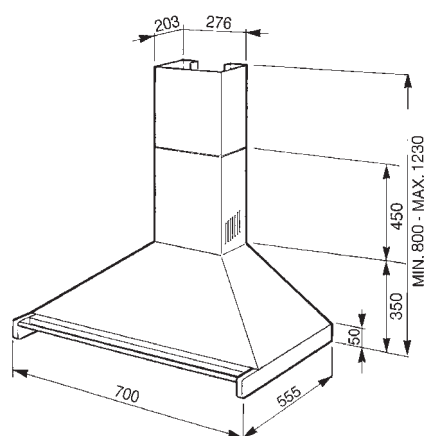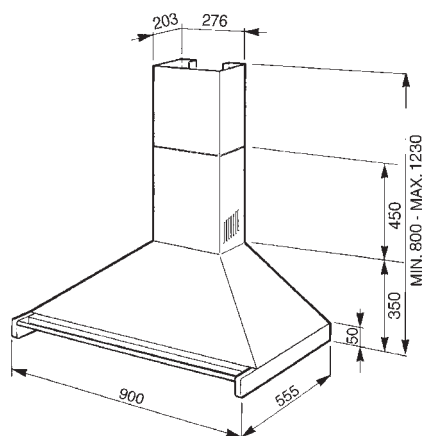

KSE110X

110CM "SYMPHONY" HOOD, ST/STEEL



1 high performance motor
4 speeds
Electronic controls
3 st/steel grease filters (dishwasher safe)
2 x 20W Halogen lights
Automatic switch-off (10 minute timer) for each speed
Filter cleaning/replacement indicator
Vent outlet Ø 150mm
Nominal power 290W

EXTRACTION RATES:
Ducted: 700 m³/h
Recirculated: 630 m³/h

Noise level: 33dB (A)

OPTIONAL EXTRAS:
Charcoal filter
Simple vent kit
Comprehensive vent kit

FLT3
SP150
SP150FLAT

AVAILABLE IN THE FOLLOWING VERSIONS:


St/steel **KSE110X**
Gloss black **KSE110BL**
White **KSE110WH**

KSE110BL

110CM "SYMPHONY" HOOD, GLOSS BLACK



KSE110WH White

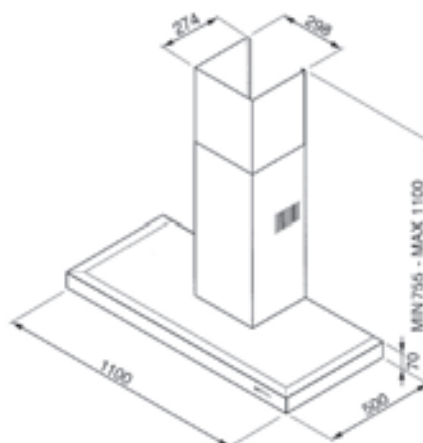

KD917X

90CM CHIMNEY HOOD, ST/STEEL



1 high performance motor
Electronic illuminated touch controls
4 speeds
2 halogen lamps
Internal re-circulation possible
Perimeter extraction
Vent outlet Ø 150mm
Nominal power 290W


EXTRACTION RATES:
Ducted 750 m³/h
Re-circulated 650 m³/h

Noise level: 44dB(A)

OPTIONAL EXTRAS:

Long life charcoal filter
Simple vent kit
Comprehensive vent kit

KITFC900
SP150
SP150FLAT

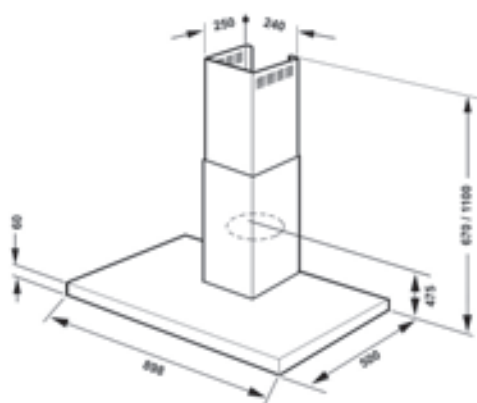

KS9600XL1

90CM CHIMNEY HOOD, POLISHED ST/STEEL



1 high performance motor, 250W
4 speeds
2 halogen lamps
3 st/steel grease filters (dishwasher safe)
Electronic controls
Timer for automatic switch off
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power 240W

EXTRACTION RATES:
Ducted 800 m³/h
Recirculated 720 m³/h

Noise level: 44dB(A)

OPTIONAL EXTRAS:


Charcoal filter
Simple ducting kit
Comprehensive ducting kit

FLT3
SP150
SP150FLAT

AVAILABLE IN THE FOLLOWING VERSIONS:

90cm wide in polished st/steel
60cm wide in brushed st/steel
60cm wide in polished st/steel

KS9600XL1
KSE6500X
KSE6600XL

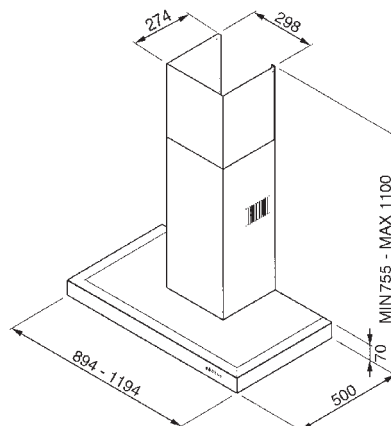

ISLAND HOODS

KI1207X

120CM ST/STEEL ISLAND HOOD




1 high performance motor
Electronic illuminated touch controls
4 speeds
3 St/steel grease filters
4 halogen lamps
Internal re-circulation possible
Perimeter extraction
Vent outlet Ø 150mm
Nominal power 330W

EXTRACTION RATES:
Ducted 750 m³/h
Re-circulated 650 m³/h

Noise level: 44dB(A)

OPTIONAL EXTRAS:
Long life charcoal filter
Comprehensive ducting kit

KITFC900
SP150FLAT

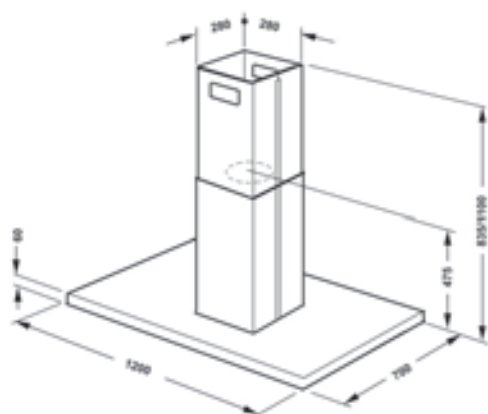

KSIV960X1

100CM GLASS & ST/STEEL ISLAND CHIMNEY HOOD




1 high performance motor, 250W, double fan
Electronic controls
3 speeds
Filter cleaning pilot lamp
Charcoal filter replacement indicator light
1 metal grease filter
4 halogen lamps
Internal re-circulation possible
Vent outlet Ø150mm
Nominal power: 280W

EXTRACTION RATES:
Ducted 800 m³/h
Re-circulated 600 m³/h

Noise level: 47dB(A)


OPTIONAL EXTRAS:
Long life charcoal filter **KITFC900**
Comprehensive ducting kit **SP150FLAT**

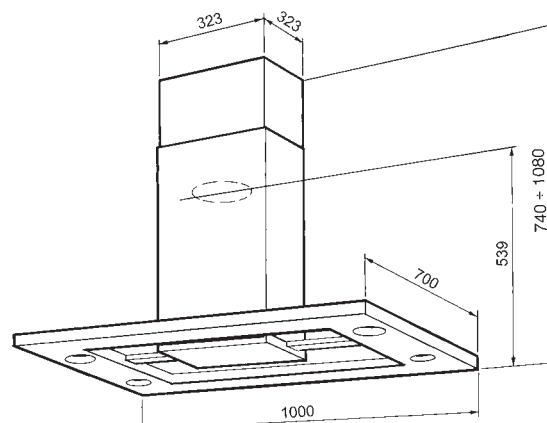

ISLAND HOODS

KIV1007X

100CM GLASS & ST/STEEL ISLAND CHIMNEY HOOD

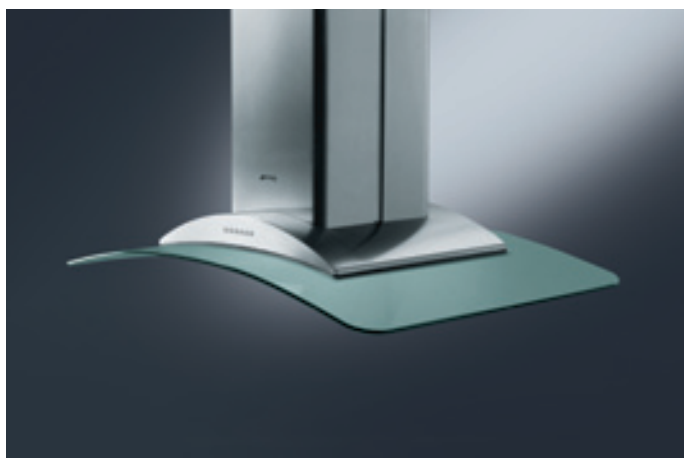


1 high performance motor, 200W, with double fan
Electronic illuminated touch controls
4 speeds
Filter cleaning pilot lamp
Charcoal filter replacement indicator light
1 metal grease filter
4 halogen lamps
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power: 330W

EXTRACTION RATES:
Ducted 750 m³/h
Recirculated 630 m³/h

Noise level: 47dB(A)

OPTIONAL EXTRAS:
Long life charcoal filter **KITFC900**
Comprehensive ducting kit **SP150FLAT**

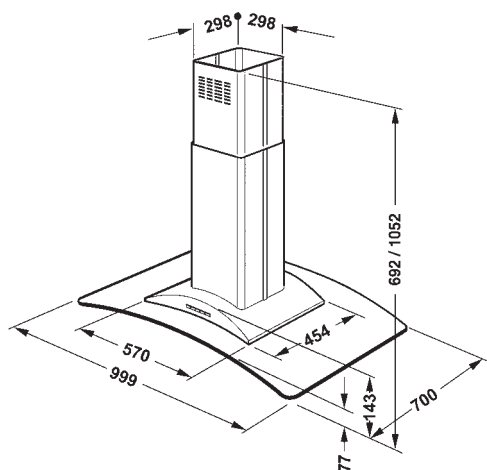

KEIV90

90CM GLASS & ST/STEEL ISLAND CHIMNEY HOOD




Electronic controls
3 speeds
2 x 20W halogen lamps
1 metal grease filter
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power: 220W

EXTRACTION RATES:
Ducted 620 m³/h
Recirculated 550 m³/h

Noise level: 46dB(A)

OPTIONAL EXTRAS:
Long life charcoal filter **KITFC900**
Comprehensive ducting kit **SP150FLAT**

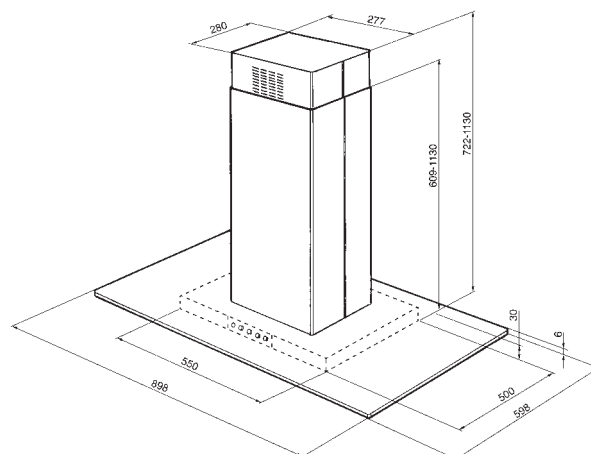

KSEV910X1

90CM GLASS & ST/STEEL CHIMNEY HOOD




1 high performance motor, 250W, double fan
Electronic controls
3 speeds
Filter cleaning pilot lamp
Charcoal filter replacement indicator light
1 metal grease filter
2 halogen lamps
Internal re-circulation possible
Vent outlet Ø150mm
Nominal power: 240W

EXTRACTION RATES:
Ducted 800 m³/h
Re-circulated 600 m³/h

Noise level: 48dB(A)

OPTIONAL EXTRAS:

Long life charcoal filter **KITFC900**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

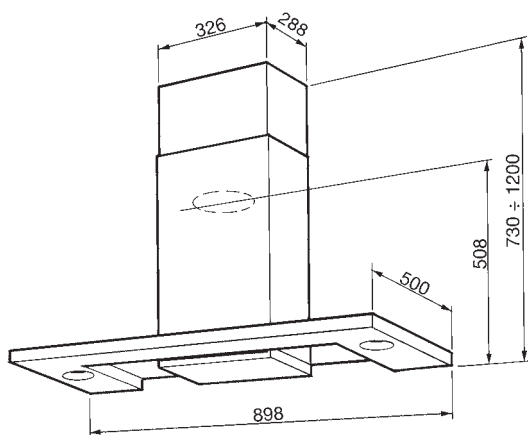

KDV907X

90CM GLASS & ST/STEEL CHIMNEY HOOD




1 high performance motor
Electronic illuminated touch controls
4 speeds
Filter cleaning pilot lamp
Charcoal filter replacement indicator light
1 metal grease filter
2 halogen lamps
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power: 290W

EXTRACTION RATES:
Ducted 750 m³/h
Recirculated 630 m³/h

Noise level: 47dB(A)

OPTIONAL EXTRAS:

Long life charcoal filter **KITFC900**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

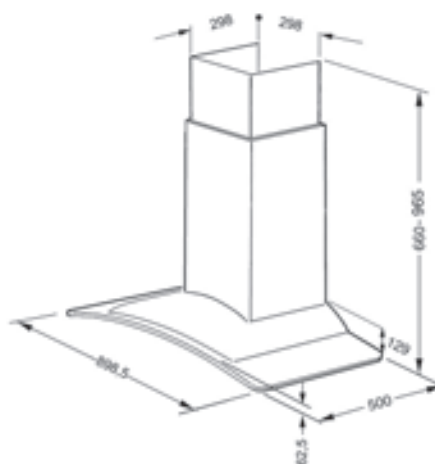

KEFV90

90CM GLASS & ST/STEEL CHIMNEY HOOD



Push button controls
3 speeds
2 x 20W halogen lamps
1 metal grease filter
Internal re-circulation possible
Vent outlet Ø 150mm
Nominal power: 220W

EXTRACTION RATES:
Ducted 620 m³/h
Re-circulated 550 m³/h

Noise level: 46 dB(A)



OPTIONAL EXTRAS:
Long life charcoal filter **KITFC900**
Simple ducting kit **SP150**
Comprehensive ducting kit **SP150FLAT**

AVAILABLE IN THE FOLLOWING VERSIONS:

90cm wide **KEFV90**
60cm wide **KEFV60**

KEFV60

60CM GLASS & ST/STEEL CHIMNEY HOOD

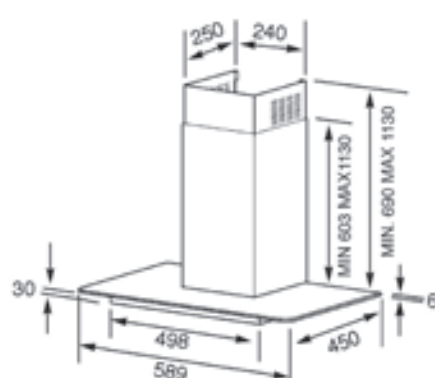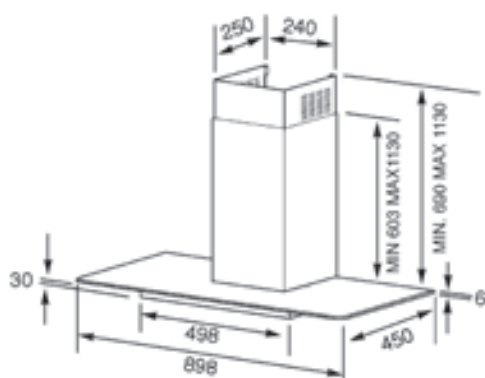

KSEP900X

90CM CHIMNEY HOOD, ST/STEEL



1 high performance motor, 200W
3 speeds
3 metal grease filters (dishwasher safe)
2 halogen lamps
Internal re-circulation possible
Vent outlet Ø 125mm
Nominal power 240W

EXTRACTION RATES:
Ducted 700 m³/h
Recirculated 620 m³/h

Noise level: 44dB(A)

OPTIONAL EXTRAS:

Charcoal filter

KITFC906

Simple ducting kit

SP215

Comprehensive ducting kit

SP217

KSEP920X

90CM CHIMNEY HOOD, ST/STEEL



1 high performance motor, 200W
3 speeds
2 metal grease filters (dishwasher safe)
2 halogen lamps
Internal recirculation possible
Vent outlet Ø 120mm
Nominal power 240W

EXTRACTION RATES:
Ducted 615 m³/h
Recirculated 550 m³/h

Noise level: 45dB(A)

OPTIONAL EXTRAS:

Charcoal filter



KITFC906

Simple ducting kit

SP215

Comprehensive ducting kit

SP217

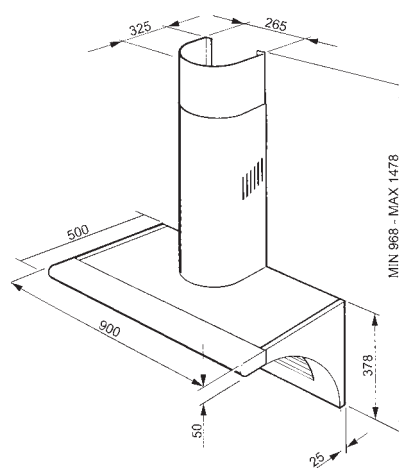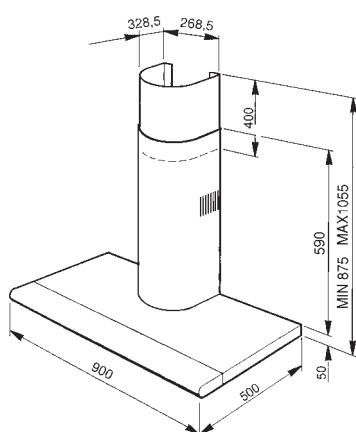

KSED95X-1

90CM CHIMNEY HOOD, ST/STEEL



KSED95P

90CM CHIMNEY HOOD, CREAM




1 high performance motor
3 speeds
3 metal grease filters (dishwasher safe)
2 lamps
Internal re-circulation possible
Vent outlet Ø 120mm
Nominal power 240W

EXTRACTION RATES:
Ducted 700 m³/h
Recirculated 600 m³/h

Noise level: 52dB(A)

OPTIONAL EXTRAS:
Charcoal filter **FLT2**
Simple ducting kit **SP215**
Comprehensive ducting kit **SP217**

AVAILABLE IN THE FOLLOWING VERSIONS:
St/Steel **KSED95X-1**
Cream **KSED95P**

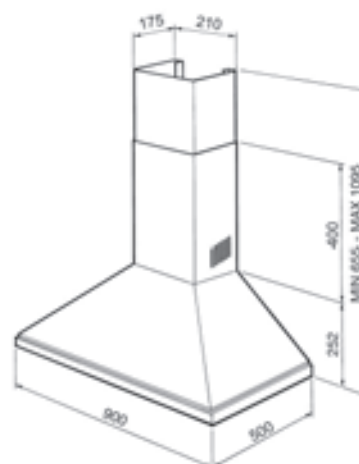

KSED65X-1

60CM CHIMNEY HOOD, ST/STEEL




1 high performance motor
3 speeds
2 metal grease filters (dishwasher safe)
2 lamps
Internal re-circulation possible
Vent outlet Ø 120mm
Nominal power 240W

EXTRACTION RATES:
Ducted 700 m³/h
Recirculated 600 m³/h

Noise level: 52dB(A)

OPTIONAL EXTRAS:
Charcoal filter **FLT2**
Simple ducting kit **SP215**
Comprehensive ducting kit **SP217**

AVAILABLE IN THE FOLLOWING VERSIONS:
St/steel 60cm wide **KSED65X-1**
St/steel 70cm wide **KSED75X-1**

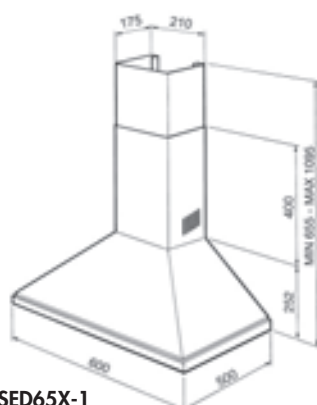

KSED65X-1

KDQ36X

36CM CHIMNEY HOOD, ST/STEEL




1 high performance motor
4 speeds
Perimeter extraction
Charcoal filter replacement indicator light
1 metal grease filter
Electronic illuminated touch controls
2 halogen lamps
Vent outlet Ø 120mm
Nominal power: 215W


EXTRACTION RATES:
Ducted 730 m³/h
Recirculated 650 m³/h

Noise level: 45dB(A)

OPTIONAL EXTRAS:
Charcoal filter **KITFC900**
Simple vent kit **SP215**
Comprehensive vent kit **SP217**

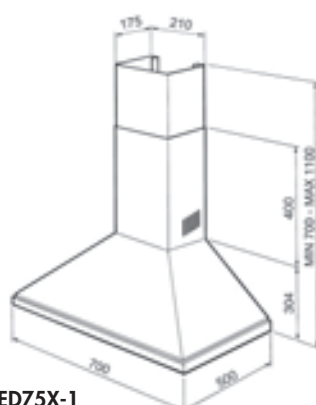


KSED75X-1

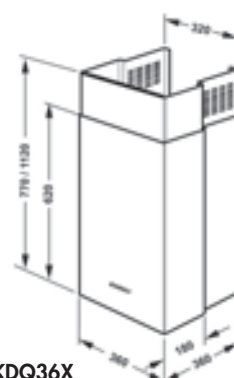

KDQ36X

KSEG72

75CM CANOPY HOOD

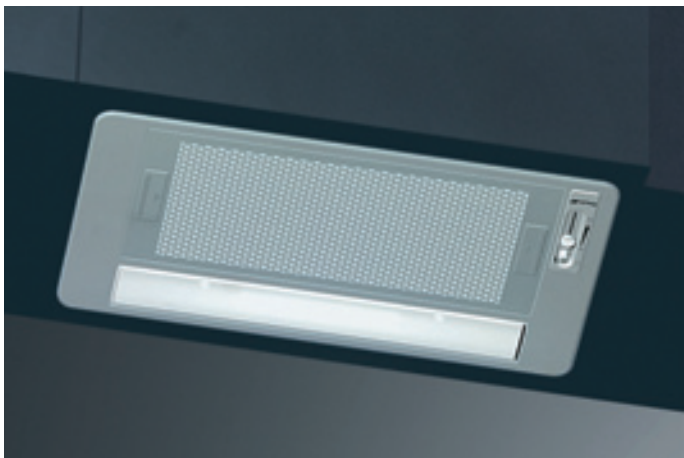


2 high performance motors, 240W
Variable speed control
1 metal grease filter (dishwasher safe)
Internal re-circulation possible
Vent outlet Ø 120mm
Nominal power 320W

EXTRACTION RATES:
Ducted 450 m³/h
Recirculated 390 m³/h

Noise level: 51dB(A)

OPTIONAL EXTRAS:

Charcoal filter **KITFC150**
Simple ducting kit **SP215**
Comprehensive ducting kit **SP217**

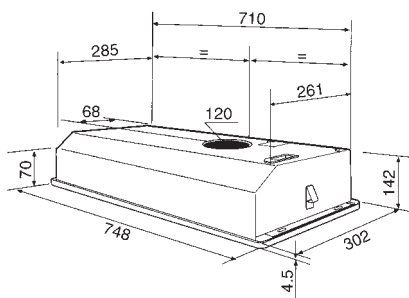

KSET600 + KITB60X

60CM TELESCOPIC HOOD



2 high performance motors, 110W
Speed cursor
2 metal grease filters
2 halogen lamps
Internal re-circulation possible
Vent outlet Ø 120mm
Nominal power 150W

EXTRACTION RATES:
Ducted 700 m³/h
Recirculated 500 m³/h

Noise level: 44dB(A)

SELECT A FRONT TO MATCH:

St/steel front **KITB60X**
Black front **KITB60NE**
White front **KITB60EB**

OPTIONAL EXTRAS:

Charcoal filter **KITFC150**
Simple ducting kit **SP215**
Comprehensive ducting kit **SP217**

